

Floor Scrapers to suit any application!

Removal of floor coverings

with the Janser machine range



INNOVATIVE
PERSPECTIVES

Professional Flooring Technology

Kevmor Trade Supplies

11 Belmont Avenue, Belmont WA 6104

P: 08 9277 7177 | E: sales@kevmor.com.au | W: kevmor.com.au

Compact Stripper 18V

NEW battery powered stripper handy for removing floor coverings, from edges, stairs and other areas that are difficult to access.

The new member of the stripper family



Specifications

Dimensions LxWxH 420x120x130mm
Weight 3.8kg (including battery)
Working width 120mm

Delivery contents

Compact Stripper 18V complete in tool box with 2x battery 5.0 Ah 18V, 1x charging station 230V, blade 80x120x0,6mm, allen key, handle, safety goggles and protective gloves
Order no. 111 120 000

Compact Stripper 18V complete in tool box with charging station 120V
Order no. 111 120 500

Compact stripper 18V in carton (without batteries, without charging station)
Order no. 111 120 200



Accessories

Battery charging kit consisting of a 10.8/18 volt quick charger and two 5.0 Ah 18 V battery packs.
Order no. 111 120 082



Spare blade 80x120x0,6mm
Order no. 111 120 001



Replacement battery pack Li-Ion 5.0 Ah 18 V
Order no. 111 120 083



Protective gloves
Order no. 119 910 010



Quick charger 10.8/18 volt
Order no. 111 120 084



Safety goggles
Order no. 440 060 000



Power-Stripper

Designed for continuous heavy use

Features

- original Flex 2000-watt motor (3 hp)
- large bearings for long life cycle
- adjustable handgrips to suit any height
- optional T-handle available
- mechanical components completely enclosed, eliminating penetration of adhesive into blade assembly and bearings
- padded cushion at top of handle to increase pressure with bodyweight

Improved features

- Infinitely height-adjustable guiding handle with vibration absorber
- New blade deflector for improved material deflection
- optional: Including height-adjustable wheel-set

Specifications

Power supply: 230 V or 120 V
Motor power : 2000 Watt (3HP)
Working width: 210 mm (8¼")
Weight : 14.4 kg (31,8 lbs)

Delivery contents

Power Stripper complete with adjustable long handle, 2 spare blades and blade protector, and serrated blade (without carrying case)

Spare blades

210 x 60 x 1,0 mm	Order no. 111 080 001
210 x 60 x 1,4 mm	Order no. 111 080 005
210 x 130 x 1,0 mm	Order no. 111 080 002
Serrated Blade	Order no. 111 095 400
Leather Pocket	Order no. 111 920 000

Optional accessories

for retrofitting the standard version

Height-adjustable wheel-set
Order no. 111 089 900

T-handle
Order no. 111 095 075



Standard version:
Guiding handle with pressure pad
Order no. 111 089 000



Special version:
Guiding handle with T-handle and chassis
Order no. 111 089 750

COSMO IV - Stripper

A powerful stripper for small and medium-sized areas.

The COSMO Stripper works on wooden or concrete surfaces and will remove virtually any substance adhering to the floor.

The handle and wheel adjustments allow different settings of the blade to fit the floor, while keeping the handle in a proper operating position.

An ideal addition to the Power Stripper and MASTER MOBIL.

Features

- adjustable cutting angle
- adjustable handle
- machine runs virtually silent with reduced vibration
- big wheels ensure comfort and efficiency
- foldable handle for easy transport



Specifications

Power supply:	230 V
Motor power:	750 Watt (1,0 HP)
Working width:	230 mm (9 1/16")
Weight:	39 kg (86 lbs)

Delivery contents

comes complete with spare blade
230 x 76 x 1,6 mm (9x3x0.062")
and extension cord 10 m (32')

Order no. 111 840 000

Spare Blade

Spare Blade for COSMO IV
230 x 76 x 1,6 mm

Order no. 111 800 107



MASTER-MOBIL III

The powerful motor combined with the revised HYDRAULIC-DIRECT-DRIVE system ensures high output with an extremely low noise level.

The MASTER-MOBIL III is self-propelled (forward and reverse) with unparalleled performance due to its high torque German designed electric motor.

Adjustable guide handle in six positions allows ergonomic operation depending on body size or preferred working position.

Front weight and medium weight can be easily removed for transportation, reducing the net weight of the machine.

Wheel hubs with freewheel option for easy handling and easy pushing of the machine without power connection.

USA Pat. 10,294,683 B2 Pat. Pend. EU, AUS



Specifications

Power supply	230V or 120 V
Speed infinitely variable:	0-16 m/min. (0-52½ ft/min.)
Empty weight	75 kg (174 lbs)
Added weight	105 kg (205 lbs)

Delivery contents:

comes complete with 5 different spare blades,

152 x 102 x 1,6 Order no. 111 800 101

152 x 127 x 1,6 Order no. 111 700 102


254 x 76 x 1,6 Order no. 111 800 103

145 x 102 x 1,6 Order no. 111 800 104

223 x 76 x 1,6 Order no. 111 800 106

front weight, extension cable and tool kit

Order no. 111 802 000



Optional accessories

Additional Weight 27 kg (59.5 lbs)
Better traction of the wheels due to higher contact pressure, so higher removal rates can be achieved when removing heavily bonded coverings.

Fast and easy mounting

Order no. 111 801 420



STRATO-MOBIL IV

The new heavy-weight class of the hydraulic walk-behind scraper machine

190 kg well distributed at a maximum speed of 23 m/min

The powerful motor combined with the new HYDRAULIC-DIRECT-DRIVE system ensures high output at a very low noise level.

The STRATO-MOBIL IV is self-propelled (forward and reverse) with adjustable speed control.

Unparalleled performance is achieved by the high torque motor.

Adjustable guide handle in six positions allows ergonomic operation depending on body size or preferred working position.

Weights can be easily removed for transportation, reducing the net weight of the machine.

USA Pat. 10,294,683 B2 Pat. Pend. EU, AUS

Specifications:

Power supply:	230 V
Speed infinitely variable:	0-23 m/min. (0-75 ft/min.)
Net weight:	85 kg (187 lbs)
Total weight:	190 kg (419 lbs)



Delivery contents:

comes complete with 5 different spare blades,

305 x 76 x 1,6	Order no. 111 700 101
152 x 127 x 1,6	Order no. 111 700 102
152 x 76 x 4,5	Order no. 111 700 106
254 x 76 x 2,5	Bestell-Nr.:111 700 104
223 x 76 x 1,6	Bestell-Nr.:111 700 108



extension cable, tool kit, trolley base and angle plate 4°

Order no. 111 740 000



Parquet Saw

2400W strong engine and special saw blades allows uninterrupted work when cutting parquet flooring

Features:

- working while standing
- easy handling
- fast cutting speed
- good suction

Specifications:

Power supply:	230V
Saw blade Ø: approx.	180 mm (7 1/16")
Motor power:	2,4 kW (3,26 hp)
Speed:	8.500 rpm
Cutting depth continuously:	max. 50 mm (2")
Weight	20 kg (44 lbs)
Suction connections suitable for	50 (2") and 76 mm (3") fitting

Delivery contents:

comes complete with standard saw blade for wood, tool for blade change and guide rail assembly, cable rewind

Order no. 114 094 000

Accessories for treatment of wooden surfaces

Standard saw blade Ø180mm (7 1/16") has 36 teeth, especially thin.



This allows for fast cutting since there is very little resistance of the parquet.

Order no. 114 094 320

Accessories for treatment mineral surfaces

Diamond separating disc Ø 205 mm (8 1/16") Can be used for cutting concrete and screed. Has a cutting depth of up to 50 mm.



Order no. 114 094 350



Cutting parquet and wooden surfaces before stripping with stripping machines.



Cutting and cleaning joints and cracks on mineral surfaces, e.g. concrete or screed.

JUNIOR Ride-on

The new compact version of the ride-on stripper with the best price-performance ratio

The forward leaning construction puts the centre of gravitation on the tool itself and allows for optimum stripping performance, normally only achieved by machines twice the size.

Features

With a working speed of up to 37m/min the stripping performance is increased, especially when removing elastic or textile coverings.

Weight of 340 or 420 kg
Weight is essential for optimum stripping performance and traction but weight restrictions are also to be observed or example soil bearing capacity, load capacity of lifts and loading capacity of transport vehicles.

“Soft touch“ operating handles
The new “soft touch“ operating handles allow easy access and fatigue-free work over many hours maintaining an ergonomic seating position. Even less experienced users are able to use the JUNIOR Ride-On without extensive training or experience.

Zero turn radius
Maximum manoeuvrability is achieved via the hydraulic rear-wheel drive together with the front swivel castor. This is especially useful when turning at the end of a room. The zero turn radius increases productivity clearly.



USA Pat. 10,273,700 B2
Pat. Pend. EU, AUS

Specifications

Power Supply: 230 V
Motor Power: 2,2 kW
Speed: up to 37 m/min (121 ft/min)

Dimensions
Length: 1300 mm (51 3/16")
Width: 610 mm (24")
Height: 1000 mm (39 3/8")


Weight
Net Weight: 340 kg (750 lbs)
Side-Weights: 80 kg (176 lbs)
gross Weight: 420 kg (926 lbs)

Order no. 111 416 000

Accessory Set Ride-On JUNIOR

configuration of the most popular and most frequently used tools

Order no. 111 497 000

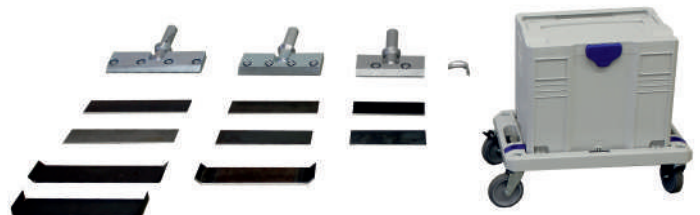

Ride-on Elektro

The 230V cable version for continuous operation

Features

- easy to operate
- complete hydraulic controls
- quiet operation without fumes
- adjustable blade pitch and angle
- zero turn radius
- non-marking tires
- easy to transport, load and unload, fits through standard doorways and elevators
- large range of blades
- optional additional weights available for even more performance

Specifications

MOTOR:

Power supply 230 V or 110 V
Motor power 2 x 1100 Watt (1.5HP)
Speed: up to 37 m (121') /min

DIMENSIONS:

Length 1250 mm (49 1/4") (without blade holder)
Width 640 mm (25")
Height with seat 1100 mm (43 1/3")

WEIGHT:

Base machine weight 470 kg (1036 lbs)
Total weight 700 kg (1543 lbs)

Order no. 111 417 000



Ride-on ADB All-Day-Battery

Appropriately named, this machine offers battery run times exceeding the average eight-hour day.

It has the ability to operate through an entire workday (8-12 hours) without requiring a battery change, recharge or electrical cord assistance.

The on-board, built-in charging system has the versatility to plug into any outlet.

The higher machine weight enables for even more effective removal work using wider blades or chisels.

Key benefits

- Most powerful battery powered ride-on stripper
- Very quiet operation without exhaust gases and no blade vibrations
- Extremely robust construction of the chassis and controls for a long life
- Simple, very precise operation by high-quality hydraulic control
- Charger securely installed in the machine
- Battery management system with automatic switch-off to protect against total discharge of the batteries
- Comfortable, adjustable seat with armrests
- Almost maintenance-free thanks to hydraulic technology



Specifications

BATTERY

Run Time:	8 - 12 hours
Charging Time:	8 - 10 hours
Speed:	up to 37 m (121')/min

DIMENSIONS:

Length:	1390 mm (54 ³ / ₄ " (without blade holder)
Width:	680 mm (26 ³ / ₄ "
Height:	1130 mm (44 ¹ / ₂ "
Height with seat:	1460 mm (57 ¹ / ₂ "

WEIGHT:

Total weight	950 kg (2094 lbs)
--------------	-------------------

Order no. 111 452 000

Features

Optimized engine technology
Modified charger

Working speed up to 61 m/min

Weight reduction possible up to approx. 800 kg

No blade vibration required, pure feed force of the hydraulic drive is enough for enormous power

Wide range of high quality blades and chisels, Variable working width of 50-685 mm

Advantage:

Longer runtimes with shorter charging times. For higher productivity and efficiency on the job site

High working speed increases the removal performance

Allows transport even in smaller elevators

Low-noise operation, maximum gentle on the subfloor, higher removal performance, longer life of the blades and chisels

The most suitable application tool to match every construction site condition in order to achieve best possible efficiency

Ride-on ADB-HS "High-Speed"

The latest generation of the industries work horse

Features

- Most powerful battery powered ride-on stripper
- Very quiet operation without exhaust gases and no blade vibrations
- Extremely robust construction of the chassis and controls for a long life
- Simple, very precise operation by high-quality hydraulic control
- Charger securely installed in the machine
- Battery management system with automatic switch-off to protect against total discharge of the batteries
- Comfortable, adjustable seat with armrests
- Almost maintenance-free thanks to hydraulic technology



Specifications

Run Time: 8 - 12 hours
 Charging Time: 8 - 10 hours
 Speed: up to 61 m (200')/min

DIMENSIONS:
 Length: 1610 mm (54³/₄"') (without blade holder)
 Width: 760 mm (25¹/₄"')
 Height: 1130 mm (44¹/₂"')
 Height with seat: 1460 mm (57¹/₂"')

WEIGHT:
 Total weight
 incl. additional weights and hydraulic
 front plate: 1180 kg (2600 lbs)

Minimum weight for transport
 in elevators 800 kg (1764 lbs)

Order no. 111 458 000

RIDE-on accessories Ready for any job!



Accessory Set - large version
 Order no. 111 490 000



Accessory Set - small version
 Order no. 111 495 000

Spare Blades

Self-scoring blades



Tough, long lasting, self-scoring blades.
90° angled self scoring wings.
Works on vinyl back, soft to medium PVC, linoleum, carpet tiles.

Bevel up



Dimensions	Order-No.	MASTER/STRATO	RIDE-ON
152 x 102 mm 1.6 mm	(4x6") (0.062")	111 800 101	x / x
200 x 102 mm 1.6 mm	(4x8") (0.062")	111 800 121	x / x
223 x 76 mm 1.6 mm (3x9") (0.062")		x / -	x
223 x 76 mm 1.6 mm (3x9") (0.062")		- / x	
305 x 76 mm 1.6 mm (3x12") (0.062")		x / x	x
360 x 76 mm 1.6 mm (3x14") (0.062")		x / x	x

Bevel down



40 x 40 mm 2.4 mm (1½x1½") (0.094")		111 400 495	x
80 x 40 mm 2.4 mm (3.1x1½") (0.094")		111 400 496	x

Bevel up



255 x 76 mm 2.4 mm (3x10") (0.094")		111 400 492	x / -
305 x 76 mm 2.4 mm (3x12") (0.094")		111 400 490	x / x
355 x 76 mm 2.4 mm (3x14") (0.094")		111 400 491	x / x
685 x 76 mm 2.4 mm (3x27") (0.094")		111 400 499	x

Bevel down



40x40x40 mm 2,4 mm (1½x1½x1½") (0,094")		111 700 495	x / x
40x80x40 mm 2,4 mm (1½x3 9/64x1½") (0,094")		111700 496	x / x

Bevel up



40x205x40 mm 2,4 mm (1½x8x1½") (0,094")		111 400 395	x
40x225x40 mm 2,4 mm (1½x9x1½") (0,094")		111 800 109	x/- x
40x255x40 mm 2,4 mm (1½x10x1½") (0,094")		111 400 391	x/- x
40x305x40 mm 2,4 mm (1½x12x1½") (0,094")		111 400 397	x
40x355x40 mm 2,4 mm (1½x14x1½") (0,094")		111 400 393	x
40x505x40 mm 2,4 mm (1½x19½x1½") (0,094")		111 400 399	x

Bevel down



40x205x40 mm 2,4 mm (1½x8x1½") (0,094")		111 400 394	x
40x225x40 mm 2,4 mm (1½x9x1½") (0,094")		111 800 108	x/- x
40x255x40 mm 2,4 mm (1½x10x1½") (0,094")		111 400 390	x/- x
40x305x40 mm 2,4 mm (1½x12x1½") (0,094")		111 400 396	x
40x355x40 mm 2,4 mm (1½x14x1½") (0,094")		111 400 392	x
40x505x40 mm 2,4 mm (1½x19½x1½v) (0,094")		111 400 398	x

Bevel up




75x155x75mm 2,4mm (6x3") (0,094")		111 400 370	x
-----------------------------------	--	-------------	---

V-Blades



45° angle. The thickness greatly reduces breakage, especially on heavily weighted machines.



with a special 40 mm beveled edge



Pre-cut as well as removal of sport floor coverings

Parquet Blade



dynamic shape, suitable for all types of parquet floors

Standard version - galvanized

width 200 mm (7 7/8")	111 800 630	x/x
-----------------------	-------------	-----




Special version - hardened and coated especially for parquet floors with HDF carrier layer. Due to the hardened blade also suitable for tiles

width 200 mm (7 7/8")	111 800 640	x/x
-----------------------	-------------	-----

Spare Blades

Standard Blades

Removal of wood flooring



Premium Blades

Ultra high quality spring steel is extra hard for long blade life.



Works on all glued down carpets, VCT, VAT, rubber tile, cork, re-scraping adhesive, elastomeric coatings.

Heavy Duty Blades

A heavy duty blade that still has a little flex. Works on VCT, VAT, wood, tile, rubber epoxy, thin-set, elastomeric coatings, scraping thin-set, glued ceramic.



Extra Heavy Duty Blades

Ultra tough coatings, ceramic & hardwood

Extremely hard, high abrasion wood, tile, lighter ceramic



Increased Angle Blade

Mainly used for VCT, but can be used on most other applications. Supplies more of an angle when needed.



Dimensions	Order-No.	MASTER/STRATO	RIDE-ON
145 x 102 mm 1.6 mm	(4x6") (0.062")	111 800 104	x / x x
152 x 127 mm 1.6 mm	(5x6") (0.062")	111 700 102	x / x x
254 x 76 mm 1.6 mm (3x10") (0.062")		111 700 103	x / x
152 x 76 mm 1.6 mm (3x6") (0.062")		111 400 210	x / x
203 x 76 mm 1.6 mm (3x8") (0.062")		111 400 220	x / x x
254 x 76 mm 1.6 mm (3x10") (0.062")		111 800 103	x / x x
304 x 76 mm 1.6 mm (3x12") (0.062")		111 400 240	x / x x
355 x 76 mm 1.6 mm (3x14") (0.062")		111 400 250	x / x x
500 x 76 mm 1.6 mm (3x19½") (0.062")		111 400 255	x
685 x 76 mm 1.6 mm (3x27") (0.062")		111 400 260	x
152 x 76 mm 2.4 mm (3x6") (0.094")		111 400 310	x / x x
203 x 76 mm 2.4 mm (3x8") (0.094")		111 400 320	x / x x
254 x 76 mm 2.4 mm (3x10") (0.094")		111 700 104	x / x x
304 x 76 mm 2.4 mm (3x12") (0.094")		111 400 340	x / x x
355 x 76 mm 2.4 mm (3x14") (0.094")		111 400 350	x / x x
500 x 76 mm 2.4 mm (3x19½") (0.094")		111 400 355	x
685 x 76 mm 2.4 mm (3x27") (0.094")		111 400 360	x
152 x 76 mm 4.5 mm (3x6") (0.18")		111 700 106	x / x x
152 x 76 mm 6.35 mm(3x6") (0.25")		111 700 105	x / x x
200 x 75 mm 1.6 mm (3x8") (0.062")		111 400 480	x / x x
250 x 75 mm 1.6 mm (3x10") (0.062")		111 400 481	x / x x

Angle Plate

Enables to reduce the working angle of the blade to the subfloor. This adjustment can improve the removal performance.

Easy mounting inside the blade holder



The angle plate is available with a 4 or 8 degree reduction, we recommend:

- on soft subfloors (i.e. wood) 8 degree angle plate
- on medium subfloors (i.e. levelling compound) 4 degree angle plate
- on hard subfloors (i.e. concrete) usually it is best without the angle plate

Angle Plate 4°	111 730 900	x / x
Angle Plate 8°	111 730 950	x / x

Straight shank with carbide tips

For ceramic tiles, thick epoxy coatings or thermo-plastic coatings.

With carbide tip for extended usage.



50 x 150 mm (2x6")	111 400 440	x
100 x 150 mm (4x6")	111 400 441	x
150 x 150 mm (6x6")	111 400 442	x

Air powered scraper SCRAP'AIR

high-performance air powered scraper

suitable for floor backing residues, adhesive residues, linoleum, tiles and rubber as well as laminate /parquet.

Specifications

Air pressure: 6-8 bar
 Air consumption: 280 l / min
 Frequency: 2950 blows / min
 Power: 30 joules
 Weight: approx. 5.3 kg

Delivery contents:

SCRAP'AIR long version length 119 cm
 supplied in carrying case complete with:
 side handle, holder with scraper blade,
 2 scraper blades as spare, oiler, 250 ml of oil,
 protective equipment for ears, eyes and hands
 Order no. 111 085 000



SCRAP'AIR short version length 53 cm
 for staircase applications
 Set complete in the case
 (accessories like in long version)
 Order no. 111 085 500

suitable compressor on demand!

Chisel Stripper PM-1600

The professional electric chisel with chassis

Removes parquet, ceramic tiles, rubber and other flooring or roofing material.
 Peels off elastic bonding and pvc coatings.

Features:

- adjustable in working angle and height
- anti-vibration rubber handles
- safety switch (Emergency OFF)
- easy to transport with heavy duty rubber wheels

Specifications

Power supply 230 V
 Motor power 1600 Watt (2 hp)
 Beat energy 27 Joule
 Working width 20-300 mm (3/4-11 3/4") depending on chisel
 Dimensions HxWxL 100 x 60 x 110 cm (39 3/8 x 23 5/8 x 43 1/4 ")
 Weight 45 kg (99 lbs)

Delivery contents:

comes complete with flat chisel,
 wide scraper 100 mm for parquet
 Order no. 111 140 000



Removal Machine ELEPHANT

Easily removes any kind of sheet flooring without producing dust or noise

- SIMPLE
- LOW-COST
- DUST-FREE
- SILENT

Excellent for needle felt and ball yarn carpets

Features:

- flexible working width up to 80 cm (2'7 1/2"), stripper machines up to 35 cm (13 3/4")
- light weight, approximately 30 kg (66.14 lbs) plus transformer 18kg (39.68 lbs.)
- can be carried by one person
- noise and dust free operation
- removes old adhesives, coatings, and flooring material
- high performance, approximately 80-100 m²/h (860-1080 sq./h)


The roller rotates only 13 rpm and the powerful driving unit needs only 50 or 60V DC so it can be driven forward and in reverse without danger

Near walls only a strip of approx. 10 cm (4") has to be removed manually. The rest of the job is done by the ELEPHANT almost automatically.

Delivery contents:

comes complete with transformer (230V or 120V are required for the transformer)

Order no. 111 050 000

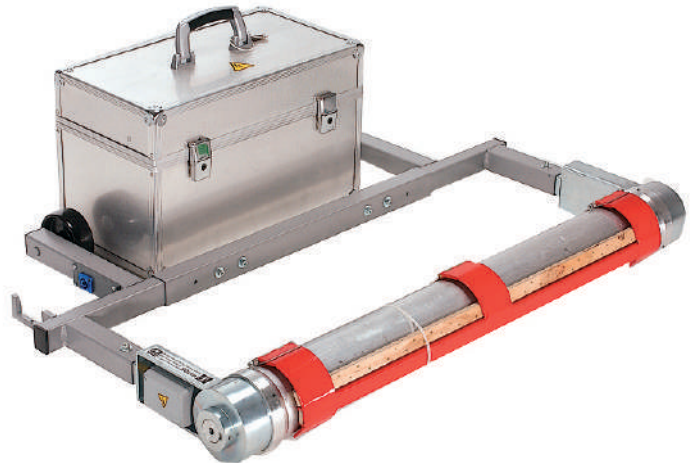

Mini-Loader MLB 760

The all-rounder for reconstruction and demolition

A genuine innovation for diverse applications – now also usable in enclosed spaces. With its powerful and durable electric motor the extremely compact Mini-Loader is ideal for the collection of removed floor-coverings.

With different accessory equipment the Mini-Loader transforms itself into a timesaving allrounder for demolition, building and clearing work.

Specifications

Motor power:	1,5 kW (2 HP)
Battery Capacity:	360 Ah
Voltage:	24 V
Run-Time:	up to 8 h
Charging-Time:	approx 12 h
Dimensions LxWxH:	1490x760x1218 mm (58 11/16")x(29 15/16")x(47 15/16")
Weight:	760 kg 760 kg (1675 lbs)

Order no. 111 950 000
(Basic unit without attachments)



Bucket with grab useful for clearing work
Order no. 111 950 600



Pallet Forks perfect for loading and unloading
Order no. 111 950 680

Loading ramps

for placing on the loading edge of the vehicle - made of aluminium, foldable

Loading ramp for car length 2 m



Load capacity	L x W	Weight	Order no.
up to 200 kg	2000x400 mm	16kg	111 700 950
up to 500 kg	2000x600mm	23kg	111 700 900
up to 600 kg	2000x800mm	32kg	111 700 940

Using these ramps, heavy machines can be loaded safely without additional help. For transportation, the ramps can be folded and stored without using too much space.

Loading ramp for mini van length 3 m



Load capacity	L x W	Weight	Order no.
up to 500 kg	3000x800 mm	44kg	111 700 960
up to 1200kg with leg supports	3000x1000mm	60kg	111 400 985

If you have any questions, please contact us

Edition 4 -2500 - 09/2022

Kevmor Trade Supplies

11 Belmont Avenue, Belmont WA 6104
P: 08 9277 7177 | E: sales@kevmor.com.au | W: kevmor.com.au

